




Technical Data



L-shaped slewing ring of European standard

Feature: Widely applied on larger diameter and limited heavy machinery, light bearing capacity, More for light machinery like small crane, Manual lift, Turntable ladder and so on.

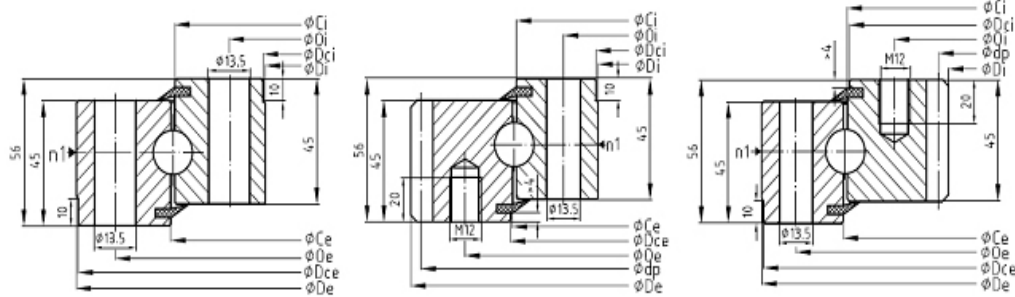

None Gear

Model	Raceway Diameter (mm)	De (mm)	Di (mm)	Oe (mm)	Oi (mm)	ne	ni	n1	Ci (mm)	Ce (mm)	Be (mm)	Bi (mm)	dp (mm)	m	Z	x	Weight (kg)
FU20.414	414	518	304	490	332	8	12	4	412,5	415,5	454	368	23
FU20.544	544	648	434	620	462	10	14	4	542,5	545,5	584	498	31
FU20.644	644	748	534	720	562	12	16	4	642,5	645,5	684	598	37
FU20.744	744	848	634	820	662	12	16	4	742,5	745,5	784	698	43
FU20.844	844	948	734	920	762	14	18	4	842,5	845,5	884	798	48
FU20.944	944	1048	834	1020	862	16	20	4	942,5	945,5	984	898	54
FU20.1094	1094	1198	984	1170	1012	16	20	4	1092,5	1095,5	1134	1048	63

Outer Gear

FW20.414	414	505	304	455	332	10	12	4	412,5	415,5	.	368	495	5	99	0	30
FW20.544	544	640	434	585	462	14	14	4	542,5	545,5	.	498	630	6	105	0	42
FW20.644	644	742	534	685	562	16	16	4	642,5	645,5	.	598	732	6	122	0	49
FW20.744	744	838	634	785	662	18	16	4	742,5	745,5	.	698	828	6	138	0	55
FW20.844	844	950	734	885	762	18	18	4	842,5	845,5	.	798	936	8	117	0	66
FW20.944	944	1046	834	985	862	20	20	4	942,5	945,5	.	898	1032	8	129	0	72
FW20.1094	1094	1198	984	1135	1012	22	20	4	1092,5	1095,5	.	1048	1184	8	148	0	84

Inner Gear

FN20.414	414	518	325	490	375	8	12	4	412,5	415,5	454	.	335	5	67	0	28
FN20.544	544	648	446	620	505	10	16	4	542,5	545,5	584	.	456	6	76	0	38
FN20.644	644	748	548	720	605	12	18	4	642,5	645,5	684	.	558	6	96	0	45
FN20.744	744	848	650	820	705	12	20	4	742,5	745,5	784	.	660	6	110	0	52
FN20.844	844	948	738	920	805	14	20	4	842,5	845,5	884	.	752	8	94	0	62
FN20.944	944	1048	842	1020	905	16	22	4	942,5	945,5	984	.	856	8	107	0	68
FN20.1094	1094	1198	986	1170	1055	16	24	4	1092,5	1095,5	1134	.	1000	8	125	0	82

n1 : M8×1