











Technical Data



(JB/T 2300-1999)









Single-Row&Four-Point Contact Ball Slewing Ring(Standard Series 01)

The load curve of our products is suitable for the Grade 8.8, 10.9, 12.9 bolts made in accordance with GB/T3098.1 and the nuts made in accordance with GB/T3098.2.

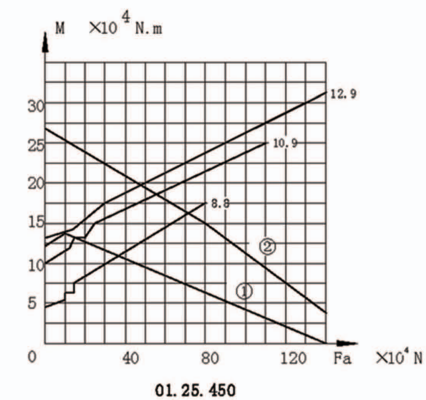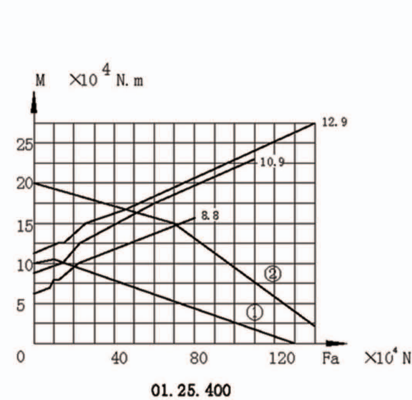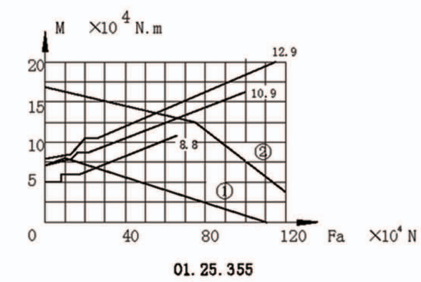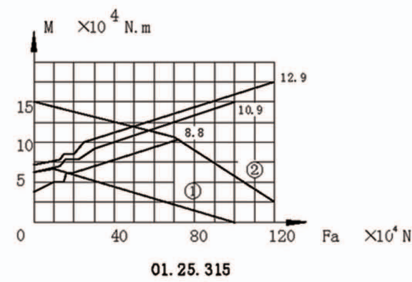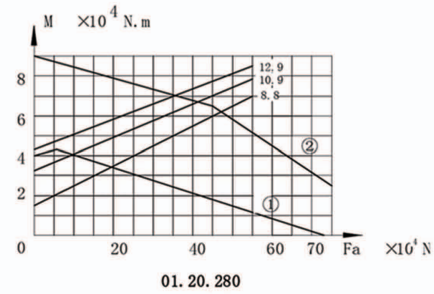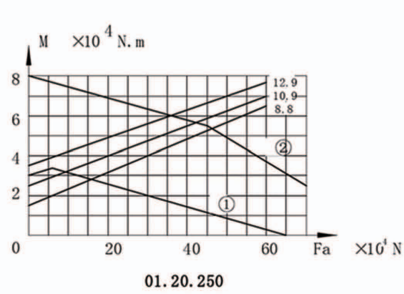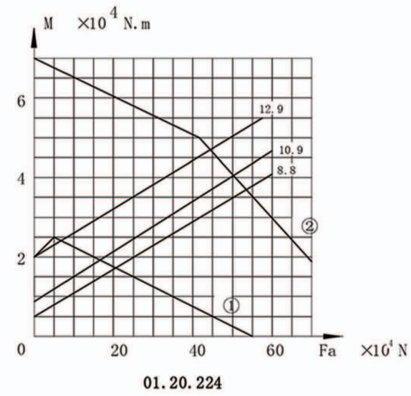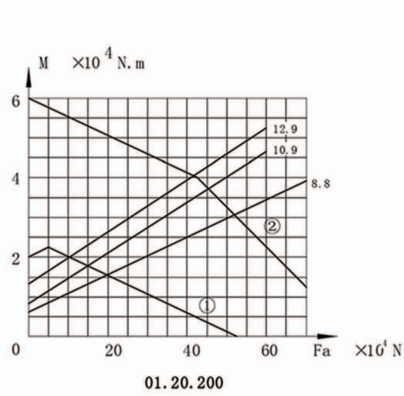











Technical Data

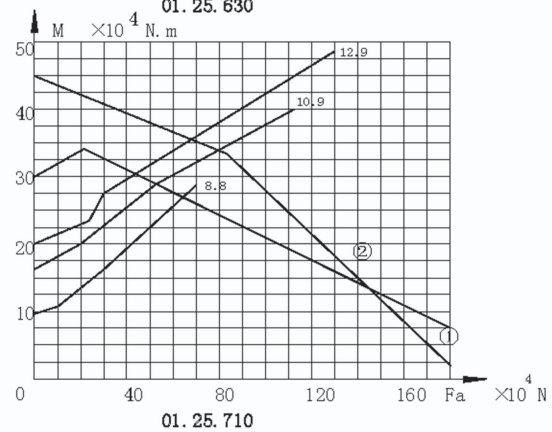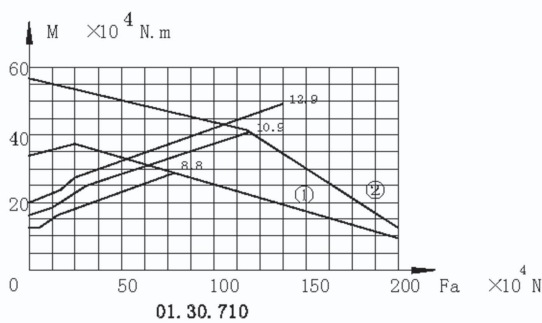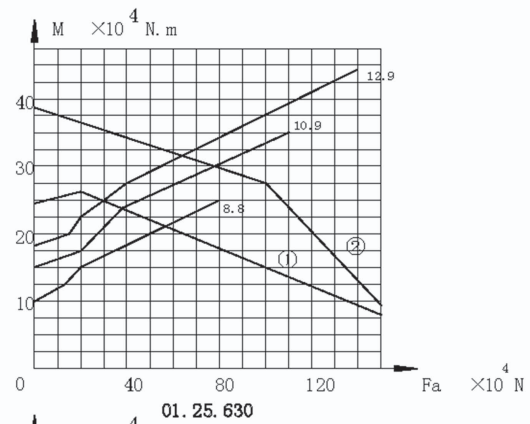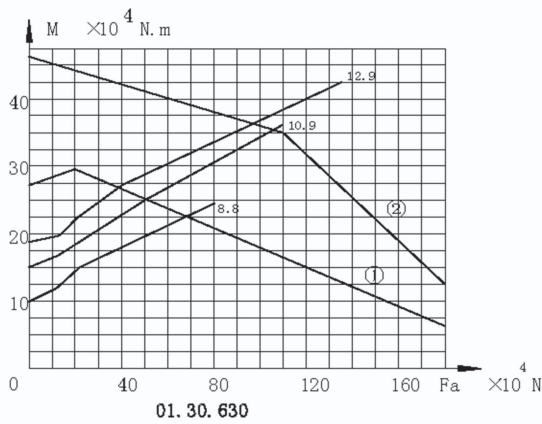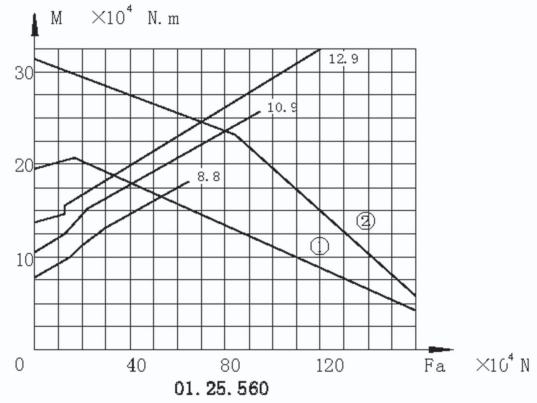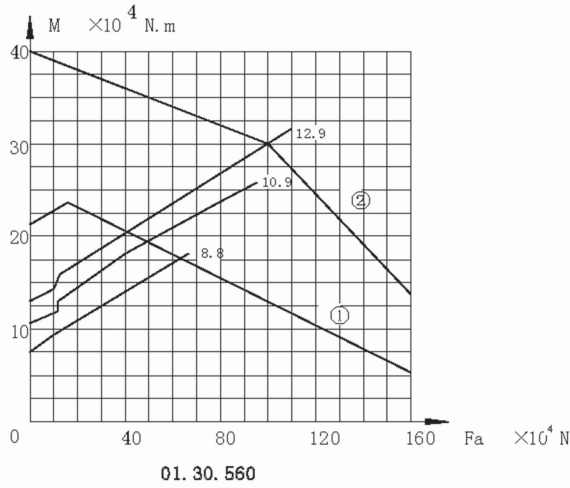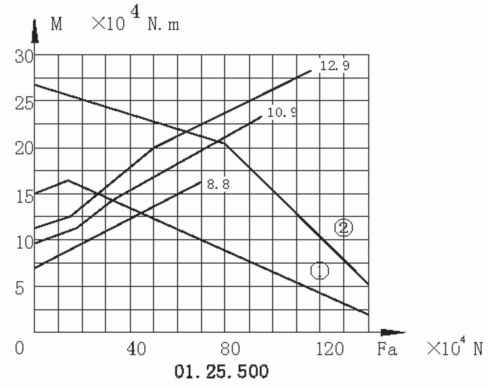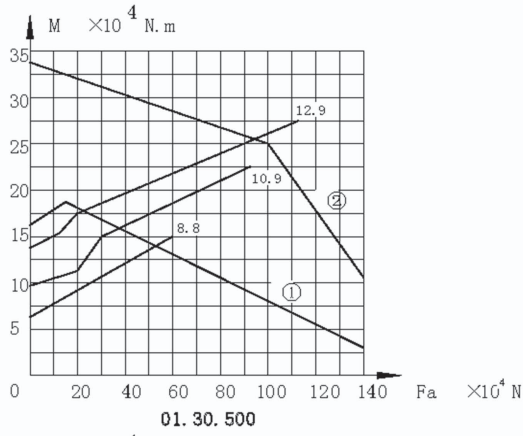




Technical Data

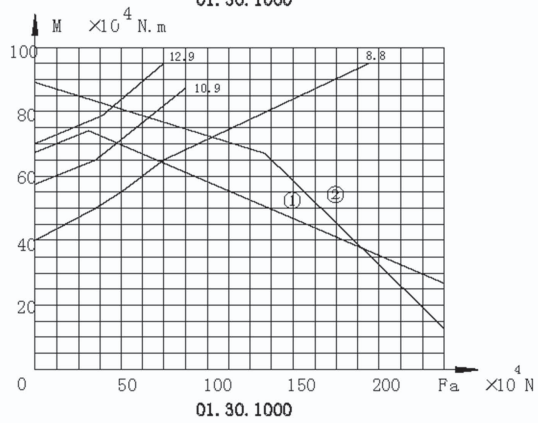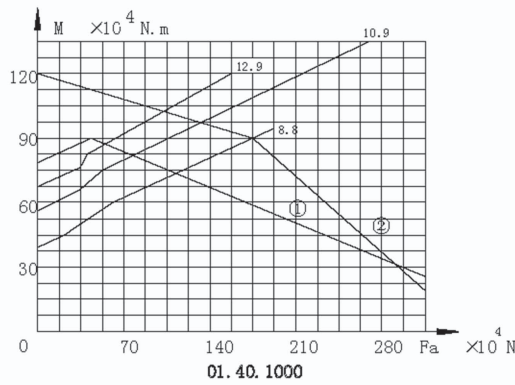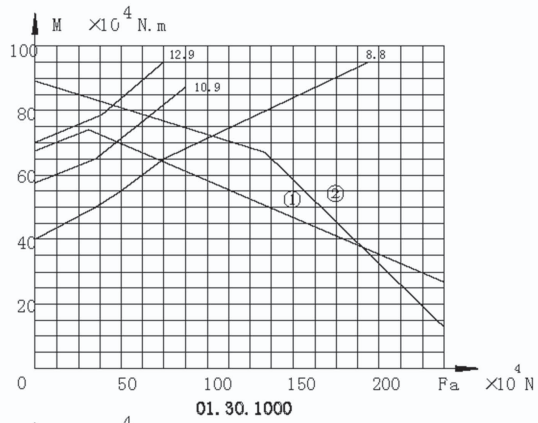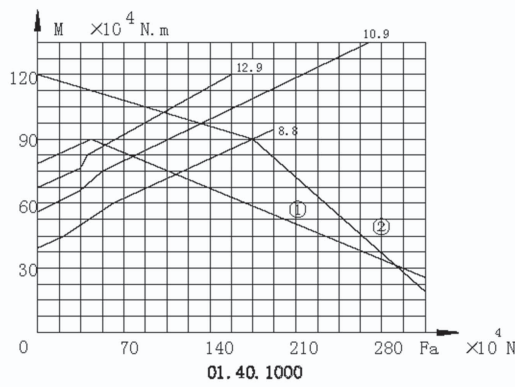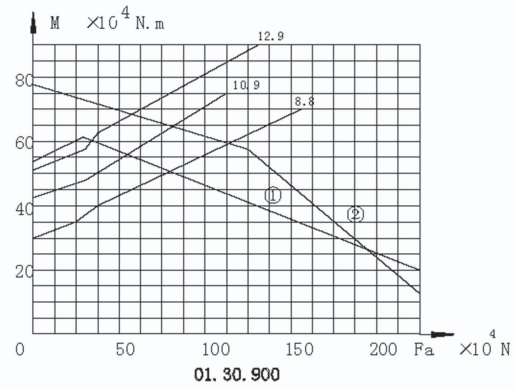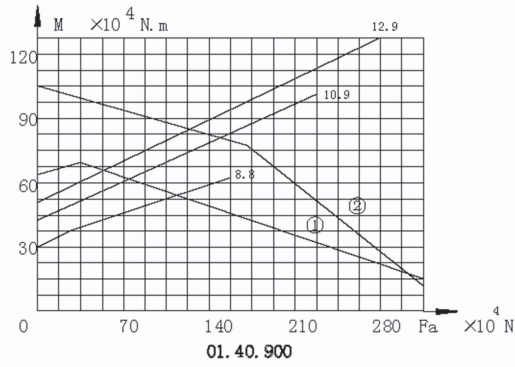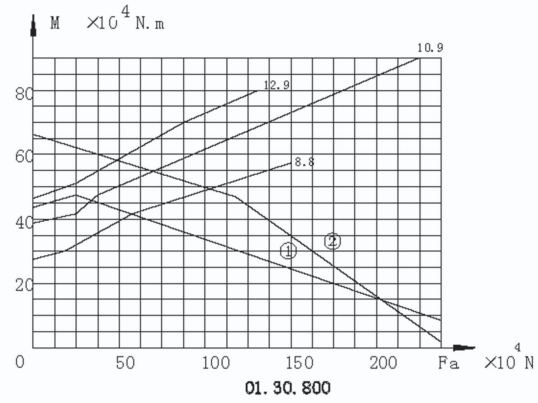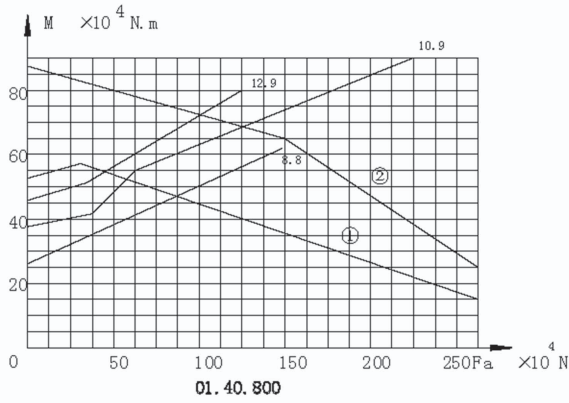





Technical Data

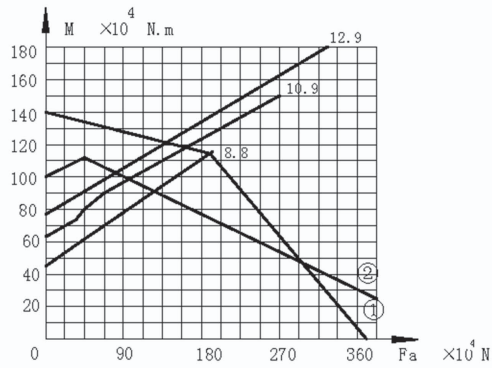


01.40.1120

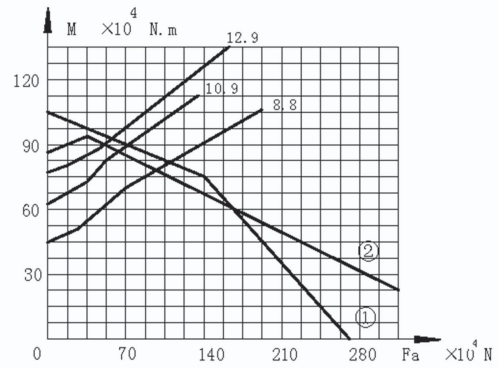


01.30.1120

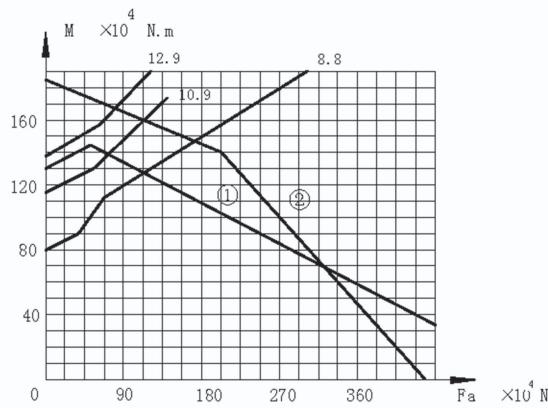


01.45.1250

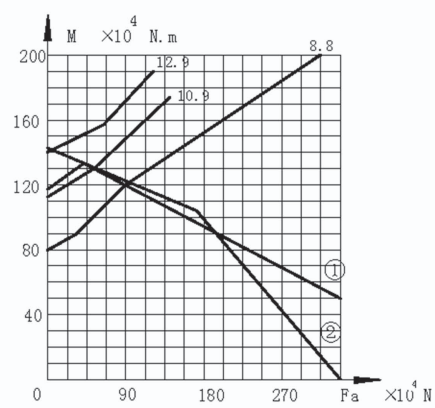


01.35.1250

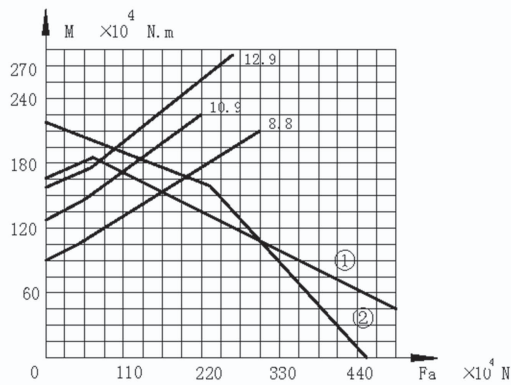


01.45.1400

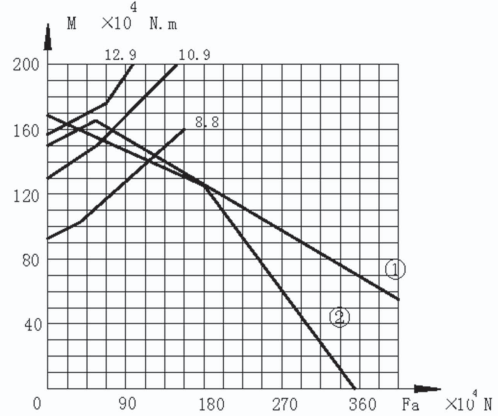

01.35.1400

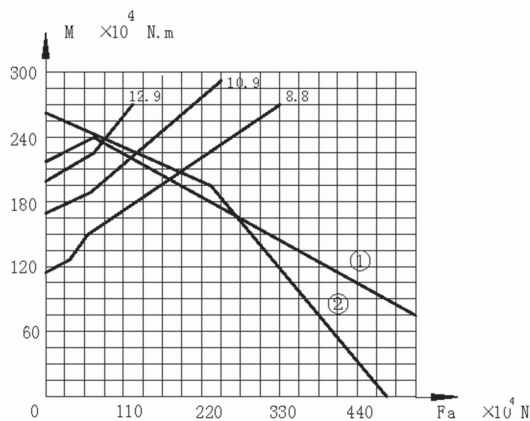


01.45.1600

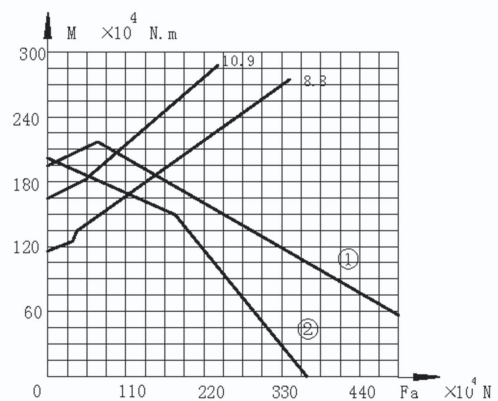


01.35.1600




Technical Data

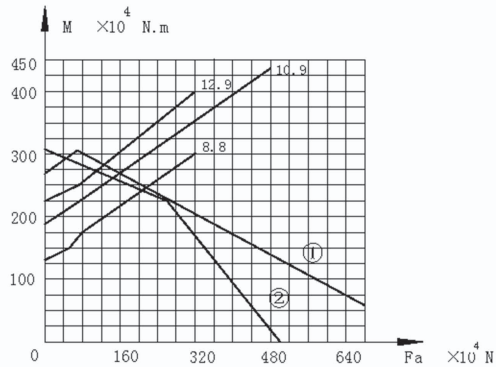


01.45.1800

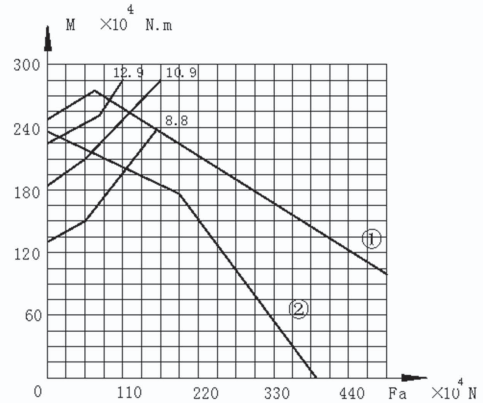


01.35.1800

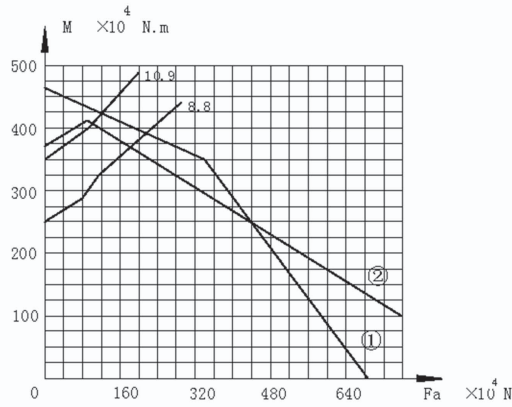


01.60.2000

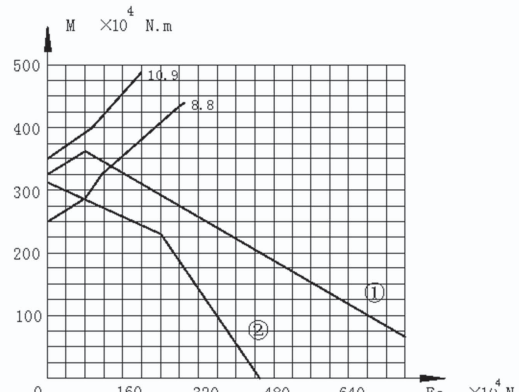


01.40.2000

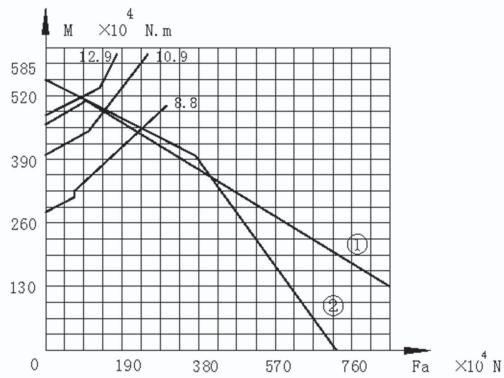


01.60.2240

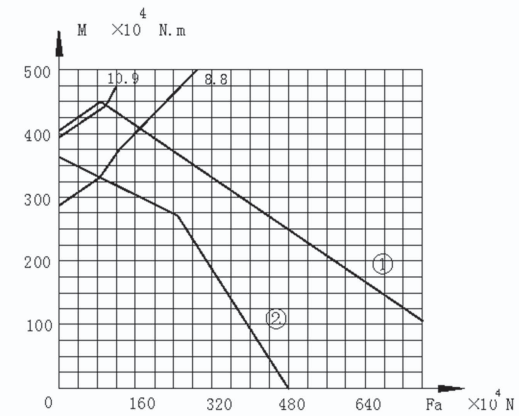

01.40.2240

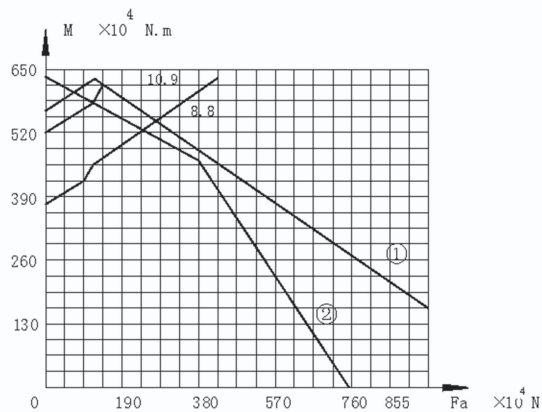

01.60.2500

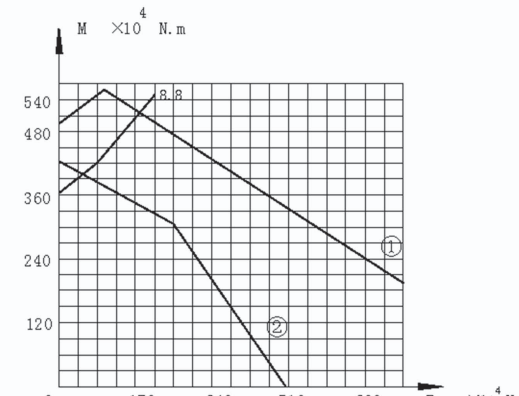

01.40.2500



Technical Data

